

KEY FEATURES



- High Pressure Die Cast Aluminum Body
- 48 - 76 mm lamp arm bracket support
- Post top fixation
- Extra clear glass cover
- IP 66 - IK08
- Different wattages available
- Symmetric and Asymmetric light distribution
- Built in surge protection device 10kV
- Ready for Smart City Applications
- Future Proof and Nema Compatible
- Nominal Voltage: 110 - 277V



Wattage	15W	25W	35W	45W	60W	80W
Instant Lumen Output	1650lm	2750lm	3850lm	4950lm	6600lm	8800lm
Typical System Efficiency	110lm/W	110lm/W	110lm/W	110lm/W	110lm/W	110lm/W

Typical System Efficiency	110 - 135 lumen / W		
Color	Warm White (WW)	Neutral White (NW)	Cool White (CW)
Color Temperature	3000K	4000 - 4500K	5000k
Typical CRI	> 70		
Beam angle	SYM / ASYM		
Input Voltage	100 - 277V AC		
Frequency	50 - 60 Hz		
Operating Temperature	-40C > +50C		
Operating Humidity	10% - 90% RH		
Materials	Die Cast Aluminum Alloy, Optical PC Lens, Tempered Glass		
Lifespan	> 100,000 burning hours		

LIGHT DISTRIBUTION

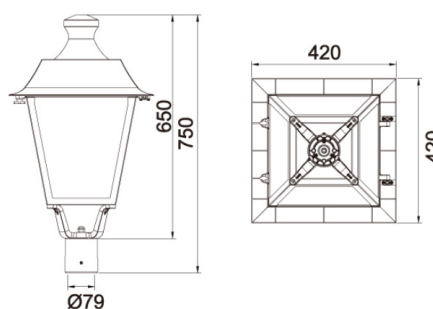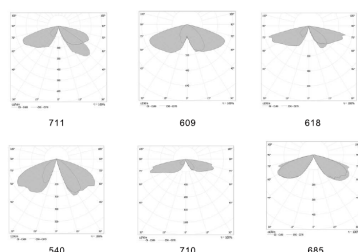

DIMENSIONS

POWER CONSUMPTION	L	W	H	N.W.
18W - 80W	420mm	420mm	750mm	7.4 kg