
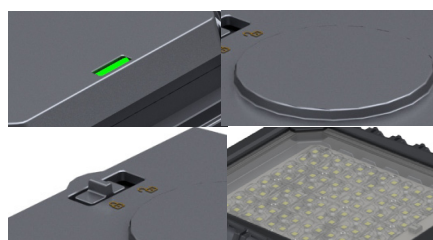


KEY FEATURES




- High Pressure Die Cast Aluminum Body
- 30 - 76 mm lamp arm bracket support
- Adjustable bracket (Lateral or Post Top)
- Extra clear flat tempered glass
- IP 66 - IK08
- Powerfactor: > 0.95
- 4 sizes available with different wattages
- Different optics
- External SPD 10kV + 4kV SPD (Volt Control)
- Smart ready, Dimming controls, sensors optional
- RoHS and TUV compliant



Wattage	30W	40W	50W	60W	90W	100W	120W	160W	180W
Instant Lumen Output	4650lm	6200lm	7750lm	9300lm	13950lm	15500lm	18600lm	24800lm	27900lm
Typical System Efficiency	155lm/W	155lm/W	155lm/W	155lm/W	155lm/W	155lm/W	155lm/W	155lm/W	155lm/W

Typical System Efficiency	> 155 lumen / W		
Color	Warm White (WW)	Neutral White (NW)	Cool White (CW)
Color Temperature	3000K	4000K	5000k
Typical CRI	> 70		
Beam angle	155D / 90D		
Input Voltage	100 - 277V AC		
Frequency	50 - 60 Hz		
Operating Temperature	-40C > +55C (Temperature Control)		
Operating Humidity	10% - 90% RH		
Materials	Die Cast Aluminum Alloy, Optical PC Lens, Tempered Glass		
Lifespan	> 100,000 burning hours		

LIGHT DISTRIBUTION

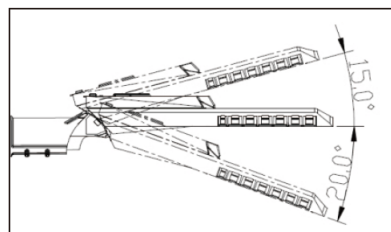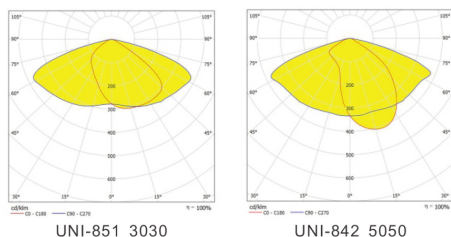

DIMENSIONS

POWER CONSUMPTION	L	W	H	N.W.
30W - 40W	541mm	216mm	119mm	3.5kg
50W - 60W	610mm	237mm	119mm	4.0kg
90W - 120W	637mm	269mm	124mm	6.0kg
150W - 160W	706mm	279mm	123mm	6.5kg



NEMA Control