

KEY FEATURES


- Die Cast Aluminum Body
- Stainless Steel Face Plate
- High Strength Toughend Clear Glass
- IP 67 - IK09
- 4Round and Square available
- Wattages from 1 to 36W available
- Different Optic Degrees
- With Safety screws
- Available in 1 color or in RGB
- Programmable option available



Wattage	3W	4W	5W	6W	9W	12W	16W	24W	36W
Instant Lumen Output	330lm	440lm	550lm	660lm	990lm	1320lm	1760lm	2640lm	3960lm
Typical System Efficiency	110lm/W	110lm/W	110lm/W	110lm/W	110lm/W	110lm/W	110lm/W	110lm/W	110lm/W

Typical System Efficiency	> 110 lumen / W		
Color	Warm White (WW)	Neutral White (NW)	RGB
Color Temperature	3000K	4000 - 4500K	--
Typical CRI	> 70		
Beam angle	10D / 70D		
Input Voltage	100 - 240V AC		
Frequency	50 - 60 Hz		
Operating Temperature	-40C > +55C		
Operating Humidity	10% - 90% RH		
Materials	Die Cast Aluminum Alloy, Stainless Steel Face Plate, Tempered Glass		
Lifespan	> 100,000 burning hours		

LIGHT DISTRIBUTION

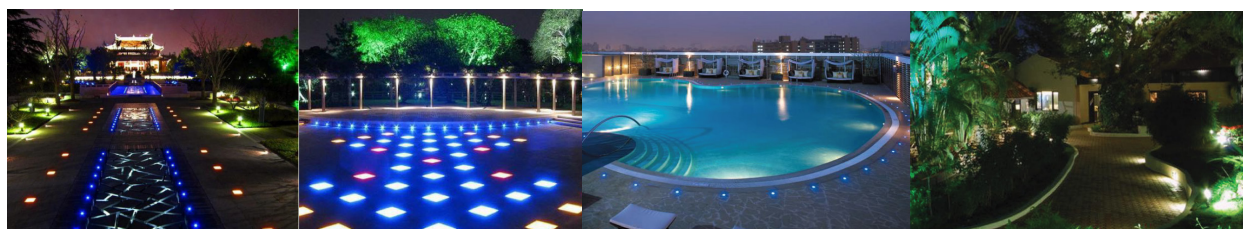

DIMENSIONS

				ROUND	DIA	H	CUT OUT
SQUARE	L	W	H	3W	100mm	80mm	95mm
3W & 4W	100mm	100mm	70mm	5W	120mm	90mm	95mm
5W & 6W	120mm	120mm	70mm	6W	130mm	95mm	117mm
9W	150mm	150mm	70mm	7W	150mm	95mm	133mm
12W	180mm	180mm	70mm	9W & 12W	160mm	95mm	155mm
16W	200mm	200mm	75mm	18W	220mm	95mm	200mm
24W	250mm	250mm	80mm	24W	250mm	95mm	235mm
36W	300mm	300mm	90mm	36W	300mm	95mm	285mm