

KEY FEATURES





- High Pressure Die Cast Aluminum Body
- 48 - 76 mm lamp arm bracket support
- Post top fixation
- Extra clear flat glass
- IP 66 - IK08
- Different wattages available
- Symmetric and Asymmetric light distribution
- Tool free maintenance
- Built in surge protection device 10kV
- Ready for Smart City Applications



Wattage	18W	25W	35W	45W	65W	80W
Instant Lumen Output	1980lm	2750lm	3850lm	4950lm	7150lm	8800lm
Typical System Efficiency	110lm/W	110lm/W	110lm/W	110lm/W	110lm/W	110lm/W

Typical System Efficiency	> 110 lumen / W		
Color	Warm White (WW)	Neutral White (NW)	Cool White (CW)
Color Temperature	3000K	4000 - 4500K	5000k
Typical CRI	> 70		
Beam angle	SYM / ASYM		
Input Voltage	100 - 277V AC		
Frequency	50 - 60 Hz		
Operating Temperature	-40C > +55C		
Operating Humidity	10% - 90% RH		
Materials	Die Cast Aluminum Alloy, Optical PC Lens, Tempered Glass		
Lifespan	> 100,000 burning hours		

LIGHT DISTRIBUTION

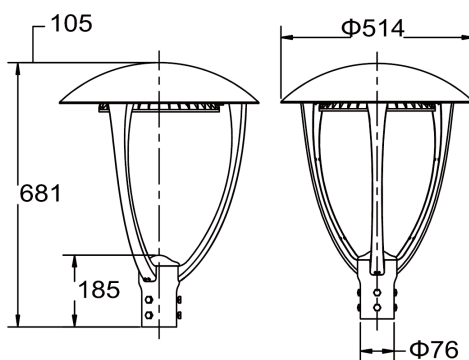

DIMENSIONS

POWER CONSUMPTION	L	W	H	N.W.
18W - 80W	681mm	514mm	514mm	9.4kg

