


KEY FEATURES



- Integrated Compact Die Cast Body
- 32 - 60 mm lamp arm bracket support
- Integrated Lens Cover - No Light Loss
- IP 66 - IK08
- 2 sizes available with 8 different wattages
- Different optics
- With Level for accurate installation
- Built in surge protection device 10kV
- Ready for Smart City Applications

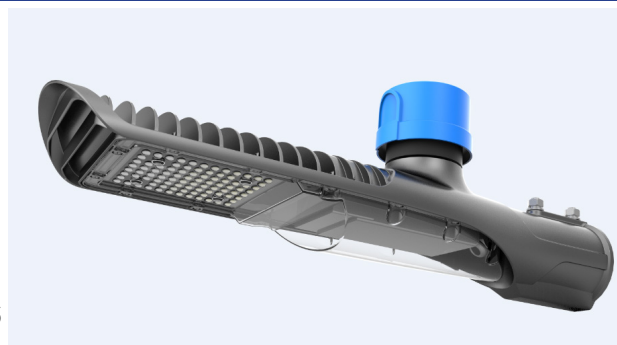

Wattage	30W	40W	50W	60W	70W	80W	90W	100W
Instant Lumen Output	3900lm	5200lm	6500lm	7800lm	9100lm	10400lm	11700lm	13000lm
Typical System Efficiency	130lm/W	130lm/W	130lm/W	130lm/W	130lm/W	130lm/W	130lm/W	130lm/W

Typical System Efficiency	> 130 lumen / W		
Color	Warm White (WW)	Neutral White (NW)	Cool White (CW)
Color Temperature	3000K	4000K	5700k
Typical CRI	> 70		
Beam angle	150D / 70D		
Input Voltage	100 - 240V AC		
Frequency	47 - 63 Hz		
Operating Temperature	-30C > +45C		
Storage Temperature	-30C > +60C		
Materials	Die Cast Aluminum Alloy, Optical PC Lens, UV Stabilized PC		
Lifespan	> 100,000 burning hours		

LIGHT DISTRIBUTION

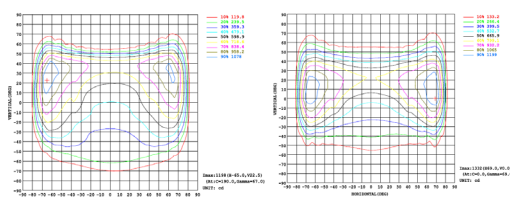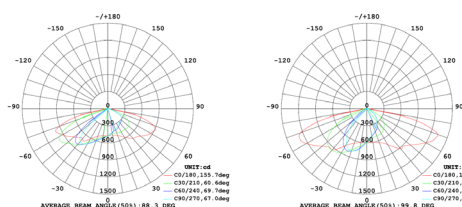

DIMENSIONS

POWER CONSUMPTION	L	W	H	N.W.
30W - 60W	485mm	135mm	95mm	2.1kg
70W - 100W	560mm	170mm	95mm	3kg

