

KEY FEATURES



- High Pressure Die Cast Aluminum Body
- U-Bracket support
- Extra clear flat tempered glass
- IP 66 - IK08
- Different wattages available
- Different optics 5 - 60D
- Nominal Voltage 100 - 277V
- Powerfactor: > 0.95
- External SPD 10kV + 4kV SPD (Volt Control)
- Smart ready, Dimming controls, sensors optional
- RoHS and TUV compliant



Wattage	10W	20W	30W	40W	50W	60W	70W	80W	90W	100W
Instant Lumen Output	1400lm	2800lm	4200lm	5600lm	7000lm	8400lm	9800lm	11200lm	12600lm	14000lm
Typical System Efficiency	140lm/W	140lm/W	140lm/W	140lm/W	140lm/W	140lm/W	140lm/W	140lm/W	140lm/W	140lm/W

Typical System Efficiency	> 140 lumen / W		
Color	Warm White (WW)	Neutral White (NW)	Cool White (CW)
Color Temperature	3000K	4000K	5700k
Typical CRI	> 70		
Beam angle	5D /60D		
Input Voltage	100 - 277V AC		
Frequency	47 - 63 Hz		
Operating Temperature	-30C > +60C (Temperature Control)		
Storage Temperature	-30C > +60C		
Materials	Die Cast Aluminum Alloy, Optical PC Lens, Tempered Glass		
Lifespan	> 100,000 burning hours		

LIGHT DISTRIBUTION

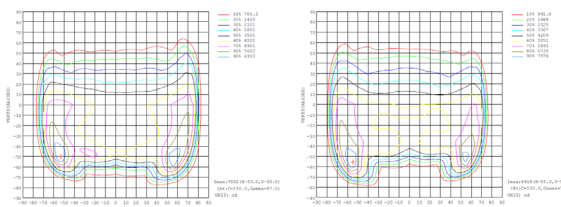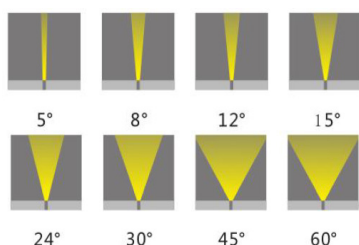

DIMENSIONS

POWER CONSUMPTION	L	W	H	N.W.
10W - 90W	287mm	196mm	196mm	2kg

