

KEY FEATURES



- High Pressure Die Cast Aluminum Body
- U-Bracket support
- Extra clear flat glass
- IP 67 - IK08
- Different wattages available
- Different optics 5 - 60D
- Nominal Voltage 100 - 265V
- 5 year warranty



Wattage	5W	6W	8W	10W	15W
Instant Lumen Output	600lm	720lm	960lm	1200lm	1800lm
Typical System Efficiency	120lm/W	120lm/W	120lm/W	120lm/W	120lm/W

Typical System Efficiency	> 120 lumen / W		
Color	Warm White (WW)	Neutral White (NW)	Cool White (CW)
Color Temperature	3000K	4000K	5700k
Typical CRI	> 70		
Beam angle	5D /60D		
Input Voltage	100 - 265V AC		
Frequency	47 - 63 Hz		
Operating Temperature	-30C > +60C		
Storage Temperature	-30C > +60C		
Materials	Die Cast Aluminum Alloy, Optical PC Lens, Tempered Glass		
Lifespan	> 100,000 burning hours		

LIGHT DISTRIBUTION

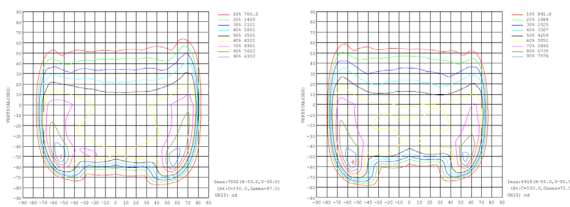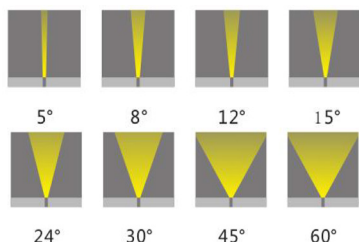

DIMENSIONS

POWER CONSUMPTION	L	W	H	N.W.
5W - 15W	100mm	100mm	69mm	1kg