

KEY FEATURES


- High Pressure Die Cast Aluminum Body
- 48 - 60 mm lamp arm bracket support
- Adjustable bracket (Lateral or Post Top)
- Extra clear flat tempered glass
- IP 66 - IK09
- Powerfactor: > 0.95
- 4 sizes available with different wattages
- Different optics
- External SPD 10kV + 4kV SPD (Volt Control)
- Smart ready, Dimming controls, sensors optional
- RoHS and TUV compliant




Wattage	35W	45W	50W	60W	90W	100W	120W	150W	180W
Instant Lumen Output	4900lm	6300lm	5500lm	8400lm	12600lm	14000lm	16800lm	21000lm	25200lm
Typical System Efficiency	140lm/W	140lm/W	140lm/W	140lm/W	140lm/W	140lm/W	140lm/W	140lm/W	140lm/W

Typical System Efficiency	> 140 lumen / W		
Color	Warm White (WW)	Neutral White (NW)	Cool White (CW)
Color Temperature	3000K	4000 - 4500K	5000k
Typical CRI	> 70		
Beam angle	155D / 90D		
Input Voltage	100 - 277V AC		
Frequency	50 - 60 Hz		
Operating Temperature	-40C > +55C (Temperature Control)		
Operating Humidity	10% - 90% RH		
Materials	Die Cast Aluminum Alloy, Optical PC Lens, Tempered Glass		
Lifespan	> 100,000 burning hours		


LIGHT DISTRIBUTION



UNI-540



UNI-618

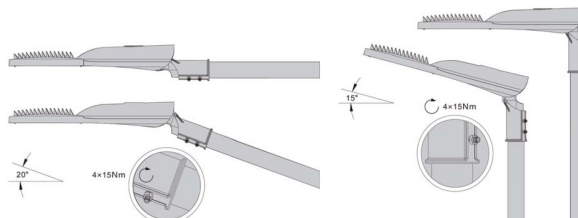

DIMENSIONS

POWER CONSUMPTION	L	W	H	N.W.
35W - 45W	537mm	220mm	131mm	3.8kg
60W - 90W	664mm	251mm	132mm	4.9kg
120W	740mm	285mm	132mm	6.2kg
150W - 200W	760mm	327mm	136mm	8.2kg

